

# LED LOW GLARE ARCHITECTURAL ADJUSTABLE DOWNLIGHT



## OSERIS

THE OSERIS low glare tilt downlight is suitable for all general lighting applications especially for high end projects where aesthetics and quality are an important aspect of the project.

With a very fine ceiling trim line and offering the latest generation of Bridgelux CoB LEDs this downlight illustrates that great lighting performance and design can work together.

Perfect solution for both commercial and residential high quality projects.

FITTING COLOURS


BLACK



WHITE



Lumax	OSERIS
Input	240V
Body	Aluminium
Colour Trim	Matt White/Black
Tilt Angle	25°
Driver	Remote Quick Connect
LED Diodes	Bridgelux COB
Beam Angle	40°
Wattage	12W
Lumen Output	800lm
Power Factor (PFC)	0.95
Colour Rendering Index (CRI)	>80
Correlated Colour Temp (CCT)	3000K
IP Rating	IP44
Electrical Class	Class 1
Cut out	80-83mm
Height	96mm
Overall diam	88mm
Operating Temp. Range	-20 +50deg
Warranty	3 Years

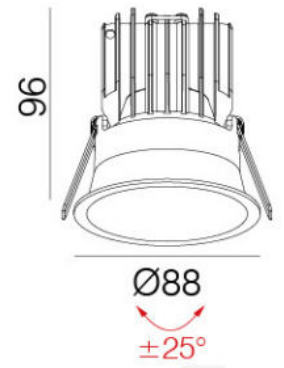

INPUT VOLTAGE  
**240V**



OUTPUT POWER  
**12W**



LUMENS  
**800**



CUT HOLE  
**90MM**



COL TEMP  
**3,000K**



WARRANTY  
**3 YEARS**

